

A DOUBLE CHAIN OF COUPLED CIRCUITS IN ANALOGY WITH MECHANICAL LATTICES

J.N. BOYD and P.N. RAYCHOWDHURY

Department of Mathematical Sciences
Virginia Commonwealth University
Richmond, Virginia 23284 U.S.A.

(Received July 2, 1990)

ABSTRACT. A unitary transformation obtained from group theoretical considerations is applied to the problem of finding the resonant frequencies of a system of coupled LC-circuits. This transformation was previously derived to separate the equations of motion for one dimensional mechanical lattices. Computations are performed in matrix notation. The electrical system is an analog of a pair of coupled linear lattices. After the resonant frequencies have been found, comparisons between the electrical and mechanical systems are noted.

KEY WORDS AND PHRASES. Born Cyclic Condition, Unitary Transformation, Symmetry Group, Lagrangian Matrix, Coupled Transmission Lines.

1980 SUBJECT CLASSIFICATION CODES. 20C35, 20G45.

1. INTRODUCTION.

This brief note is a by-product of work done in mechanics rather than circuit analysis. But, having worked problems involving coupled mechanical oscillators, simple changes of names have provided us with results for linearly coupled circuits since the underlying mathematics of eigenvalues and eigenfunctions is the same for the mechanical and electrical systems. We claim no specific relevance for our work to matters of immediate practical concern to electrical engineers. However, we do submit our paper in hopes that readers concerned with such topics as coupled transmission lines and translationally invariant circuits will find both the analogy to mechanical lattices and the mathematical exercise to be of interest. [1]

In our note to follow, we shall apply to a system of coupled LC-circuits a unitary transformation which was derived from the symmetries of a mechanical analog of the electrical system. In the mechanical problem, the transformation separated the equations of motion for a one-dimensional lattice of N identical particles having nearest neighbors coupled with harmonic springs. The geometry of the linear array of springs and particles was simplified by using the Born cyclic condition to convert the lattice into a circular ring with the equilibrium positions of the masses at the vertices of a regular, plane N -gon. The symmetry group of the linear array then became the rotation group $C(N)$ for which the rotation by $\frac{2\pi}{N}$ radian serves as a generator, and the irreducible matrix representations of $C(N)$ determine the entries of the unitary transformation matrix

$$U = \frac{1}{\sqrt{N}} (u_{k\ell}) \quad (1.1)$$

where

$$u_{k\ell} = \exp \frac{2\pi k\ell}{N} i. \quad (1.2)$$

As we proceed, it should become apparent that U does indeed possess the properties which simplify our calculations. We direct readers interested in the construction of the matrix U to the references cited at the conclusion of this introduction. In our work with mechanical lattices, we wrote a Lagrangian for each system in matrix notation. Then we diagonalized that Lagrangian matrix by performing a similarity transformation with U . From the transformed Lagrangian, the natural frequencies of vibration for the system under consideration were readily obtainable. [2,3,4,5,6,7]

2. COUPLED CHAINS OF LC-CIRCUITS.

Let us consider a linear, double array of LC-circuits with $2N$ circuits in all. By application of the Born condition, we can connect the first and $(2N-1)$ -th circuits and the 2-nd and $2N$ -th circuits to obtain the circular

array with the connection as indicated in Figure 1. We desire to compute the resonant frequencies of this system.

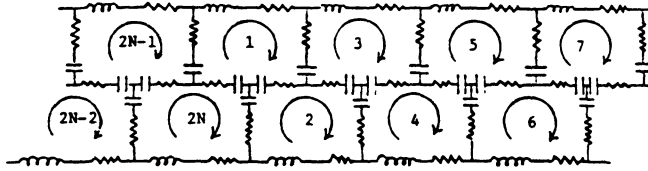


Figure 1.

Circuits $2k$ and $2k \pm 1$ (for k an integer) are coupled by capacitors C_1 having resistances R_1 . (See Figure 2.) Circuits k and $k \pm 2$ are coupled by capacitors C_2 having resistances R_2 . All inductors have the same value, L , with resistance R .

We recognize three, interwoven linear arrays of circuits, each array being analogous to a linear lattice of particles and springs:

- 1, 2, 3, ..., $2N - 1$, $2N$;
- 1, 3, 5, ..., $2N - 3$, $2N - 1$; and
- 2, 4, 6, ..., $2N - 2$, $2N$.

We also recognize that the permutation P which sends circuit k to circuit $k + 1 \pmod{2N}$ is a symmetry operation for the system and that the group $G = \{P, P^2, P^3, \dots, P^{2N}\}$ is a symmetry group of the double array once we have connected the first and second circuits to the $(2N - 1)$ -th and $2N$ -th circuits. Furthermore, G is isomorphic to the rotation group $C(2N)$.

In Figure 1, there are $2N$ current loops indicated. In the k -th circuit, \dot{q}_k denotes the current in its loop while $q_k = \int \dot{q}_k dt$ gives the charge associated with that current on each capacitor. Figure 2 shows the currents in all parts of the k -th circuit.

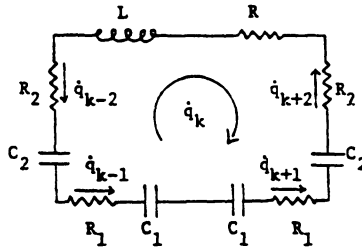


Figure 2.

Since there is no impressed E M F, we can write the k -th circuit equation as

$$\begin{aligned}
 L\ddot{q}_k + (R + 2R_1 + 2R_2) \dot{q}_k - R_1(\dot{q}_{k-1} + \dot{q}_{k+1}) \\
 - R_2(\dot{q}_{k-2} + \dot{q}_{k+2}) + \left(\frac{2}{C_1} + \frac{2}{C_2}\right)q_k \\
 - \frac{1}{C_1}(q_{k-1} + q_{k+1}) - \frac{1}{C_2}(q_{k-2} + q_{k+2}) = 0.
 \end{aligned}$$

The equations for all the circuits can then be condensed into the single matrix equation

$$L\ddot{Q} + R\dot{Q} + R_1A\dot{Q} + R_2B\dot{Q} + \frac{1}{C_1}AQ + \frac{1}{C_2}BQ = 0. \tag{2}$$

In Equation 2, Q is the column matrix giving the $2N$ components of the charge: $Q = \text{col}(q_1 q_2 \dots q_{2N})$. Similarly, $\dot{Q} = \text{col}(\dot{q}_1 \dot{q}_2 \dots \dot{q}_{2N})$ and $\ddot{Q} = \text{col}(\ddot{q}_1 \ddot{q}_2 \dots \ddot{q}_{2N})$. The matrices A and B are symmetric and have dimensions $2N \times 2N$:

$$A = \begin{bmatrix} 2 & -1 & 0 & 0 & \dots & 0 & -1 \\ -1 & 2 & -1 & 0 & \dots & 0 & 0 \\ 0 & -1 & 2 & -1 & \dots & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ -1 & 0 & 0 & 0 & \dots & -1 & 2 \end{bmatrix}$$

$$B = \begin{bmatrix} 2 & 0 & -1 & 0 & \dots & -1 & 0 \\ 0 & 2 & 0 & -1 & \dots & 0 & -1 \\ -1 & 0 & 2 & 0 & \dots & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & -1 & 0 & 0 & \dots & 0 & 2 \end{bmatrix}$$

We now perform a similarity transformation upon this matrix equation. The unitary transformation matrix is obtained from Equations 1.1 and 1.2 by replacing N with $2N$. Thus U becomes

$$U = \begin{bmatrix} \exp \frac{2\pi i}{2N} & \exp \frac{4\pi i}{2N} & \exp \frac{6\pi i}{2N} & \dots & 1 \\ \exp \frac{4\pi i}{2N} & \exp \frac{8\pi i}{2N} & \exp \frac{12\pi i}{2N} & \dots & 1 \\ \exp \frac{6\pi i}{2N} & \exp \frac{12\pi i}{2N} & \exp \frac{18\pi i}{2N} & \dots & 1 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 1 & 1 & 1 & \dots & 1 \end{bmatrix}$$

If we denote the transformed charge vector by $P = UQ = \text{col}(p_1 p_2 \dots p_{2N})$, Equation 2 then becomes

$$LU\ddot{Q} + RU\dot{Q} + R_1 UAU^{-1}U\dot{Q} + R_2 UBU^{-1}U\dot{Q} + \frac{1}{C_1} UAU^{-1}UQ + \frac{1}{C_2} UBU^{-1}UQ = 0$$

or

$$L\ddot{P} + R\dot{P} + R_1 UAU^{-1}\dot{P} + R_2 UBU^{-1}\dot{P} + \frac{1}{C_1} UAU^{-1}P + \frac{1}{C_2} UBU^{-1}P = 0. \tag{3}$$

By straightforward computation previously performed in simplifying the equations of motion for mechanical lattices [2], we know that

$$UAU^{-1} = \begin{bmatrix} 4\sin^2 \frac{\pi}{2N} & 0 & 0 & \dots & 0 \\ 0 & 4\sin^2 \frac{2\pi}{2N} & 0 & \dots & 0 \\ 0 & 0 & 4\sin^2 \frac{3\pi}{2N} & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \dots & 0 \end{bmatrix}$$

and

$$UBU^{-1} = \begin{bmatrix} 4\sin^2 \frac{\pi}{N} & 0 & 0 & \dots & 0 \\ 0 & 4\sin^2 \frac{2\pi}{N} & 0 & \dots & 0 \\ 0 & 0 & 4\sin^2 \frac{3\pi}{N} & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \dots & 0 \end{bmatrix}$$

Then matrix Equation 3 implies that the equation for the k -th transformed coordinate is

$$L\ddot{p}_k + \left(R + 4R_1 \sin^2 \frac{k\pi}{2N} + 4R_2 \sin^2 \frac{k\pi}{N} \right) \dot{p}_k + \left(\frac{4}{C_1} \sin^2 \frac{k\pi}{2N} + \frac{4}{C_2} \sin^2 \frac{k\pi}{N} \right) p_k = 0.$$

The technique for solution of this differential equation by letting $p_k = e^{\alpha(k)t}$ is well known. We find that, if $\left(R + 4R_1 \sin^2 \frac{k\pi}{2N} + 4R_2 \sin^2 \frac{k\pi}{N} \right)^2 < 4L \left(\frac{4}{C_1} \sin^2 \frac{k\pi}{2N} + \frac{4}{C_2} \sin^2 \frac{k\pi}{N} \right)$, we obtain the resonant frequencies $f(k) = \frac{1}{4\pi L} \left[4L \left(\frac{4}{C_1} \sin^2 \frac{k\pi}{2N} + \frac{4}{C_2} \sin^2 \frac{k\pi}{N} \right) - \left(R + 4R_1 \sin^2 \frac{k\pi}{2N} + 4R_2 \sin^2 \frac{k\pi}{N} \right)^2 \right]^{\frac{1}{2}}$.

3. OBSERVATIONS.

In the event that $R=R_1=R_2=0$, the frequency distribution for $k \in \{1,2,3,\dots,2N\}$ reduces to that for coupled linear lattices for which there is no energy loss during oscillation.

The array of circuits corresponds to a double chain of identical particles as shown in Figure 3. Line segments between vertices indicate connecting ideal springs. The unit cell for the double chain is a parallelogram, and the triangles with vertices $k, k+1, k+2$ are isosceles. The frequencies computed correspond to longitudinal vibrations which are parallel to the center line (CL) of the chain.

We observe that the chains, $1,3,5,\dots,2N-1$ and $2,4,6,\dots,2N$, are uncoupled by letting $C_1 \rightarrow \infty$. If the resistances are all taken to be zero, the resulting frequency distribution is just that for longitudinal vibrations in a linear lattice of N particles with mass numerically equal to L which are connected by harmonic springs of force constant $\frac{1}{C_2}$ [2].

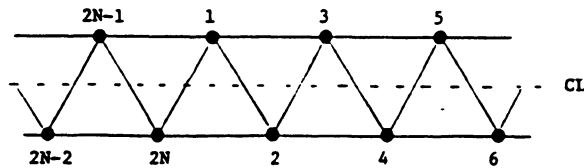


Figure 3.

REFERENCES

1. Louw, W.J., "Transmission Lines Revisited," *IEEE Trans. Educ.* 31 (1988), 234-6.
2. Boyd, J.N. and Raychowdhury, P.N., "An Application of Projection Operators to a One Dimensional Crystal," *Bulletin of the Institute of Mathematics, Academia Sinica* 7 (1979), 133-144.
3. _____, "A One Dimensional Crystal with Nearest Neighbors Coupled Through their Velocities," in *ASME Journal of Dynamic Systems, Measurement and Control* 103 (1981), 293-6.
4. _____, "Group Representations in Lagrangian Mechanics," *Physica* 114A (1982), 604-8.
5. _____, "Finite Group Representation Theory Applied to Coupled LC-Circuits," *Journal of Engineering Sciences* 9 (1983), 43-9.
6. _____, "Wave Prorogations in Two-Dimensional Lattices," *Pure and Applied Mathematika Sciences* XX (1984), 1-8.
7. _____, "A Group Theoretic Approach to Generalized Harmonic Vibrations in a One Dimensional Lattice," *International Journal of Mathematics and Mathematical Sciences* 9 (1986), 131-6.

Special Issue on Modeling Experimental Nonlinear Dynamics and Chaotic Scenarios

Call for Papers

Thinking about nonlinearity in engineering areas, up to the 70s, was focused on intentionally built nonlinear parts in order to improve the operational characteristics of a device or system. Keying, saturation, hysteretic phenomena, and dead zones were added to existing devices increasing their behavior diversity and precision. In this context, an intrinsic nonlinearity was treated just as a linear approximation, around equilibrium points.

Inspired on the rediscovering of the richness of nonlinear and chaotic phenomena, engineers started using analytical tools from "Qualitative Theory of Differential Equations," allowing more precise analysis and synthesis, in order to produce new vital products and services. Bifurcation theory, dynamical systems and chaos started to be part of the mandatory set of tools for design engineers.

This proposed special edition of the *Mathematical Problems in Engineering* aims to provide a picture of the importance of the bifurcation theory, relating it with nonlinear and chaotic dynamics for natural and engineered systems. Ideas of how this dynamics can be captured through precisely tailored real and numerical experiments and understanding by the combination of specific tools that associate dynamical system theory and geometric tools in a very clever, sophisticated, and at the same time simple and unique analytical environment are the subject of this issue, allowing new methods to design high-precision devices and equipment.

Authors should follow the Mathematical Problems in Engineering manuscript format described at <http://www.hindawi.com/journals/mpe/>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/> according to the following timetable:

Manuscript Due	February 1, 2009
First Round of Reviews	May 1, 2009
Publication Date	August 1, 2009

Guest Editors

José Roberto Castilho Piqueira, Telecommunication and Control Engineering Department, Polytechnic School, The University of São Paulo, 05508-970 São Paulo, Brazil; piqueira@lac.usp.br

Elbert E. Neher Macau, Laboratório Associado de Matemática Aplicada e Computação (LAC), Instituto Nacional de Pesquisas Espaciais (INPE), São José dos Campos, 12227-010 São Paulo, Brazil ; elbert@lac.inpe.br

Celso Grebogi, Department of Physics, King's College, University of Aberdeen, Aberdeen AB24 3UE, UK; grebogi@abdn.ac.uk